

Jerrican - 2 1/2 Gallon, Blue



 Enlarge

Store or transport chemicals and non-hazardous liquids.

- High-density polyethylene.
- FDA compliant.
- Caps included.

[Additional Info](#)

[Parts/Accessories](#)

[Email Page](#)

[Add to Favorites](#)

[Request a Catalog](#)

DIMENSIONS:

- Actual: 9.3 x 8.3 x 11.5" (L x W x H)
- Opening: 2"

TEMPERATURE:

- Filling Container- Maximum: 180 F

COMPATIBILITY:

- Can be used with H-2955- Drum Faucet.
 - Drill a hole in center of cap and screw the faucet into the cap.

COMPATIBLE SHRINK BANDS:

- 1" Clear, Perf: S-12234
- 1" Clear, Non-Perf: S-12225
- 2" Clear, Perf: S-18629
- Safety: S-16289

CAPACITY:

- Overflow: 2.8 gal

WEIGHT:

- 676 grams

FEATURES:

- Cap:
 - Size: 63 mm
 - Works with 3/4" NPT faucet or spigot.
 - Leakproof when tightened to 150 in/lb.

RECYCLING:

- Recyclable

USAGE:

- While made of FDA compliant resins, it is recommended to clean before first use.

SPECIFICATIONS:

- BPA Free

Availability: [In Stock](#)
Unit Weight: 1.60 lbs.

[Instructions](#)

[Test Report](#)


[Catalog Page 523](#)

Country of Origin: USA

SECTION I: Certification

Periodic Retest
 2.5 Gallon Rectangle HDPE Packaging (Equistar LP5100 Resin)


Priority Plastics, Inc. certifies that the packaging referenced above has passed the standards of the DEPARTMENT OF TRANSPORTATION'S TITLE 49 CFR; Performance Oriented Packaging Standards, Section 178. It is the responsibility of the end user to determine authorization for use under these regulations. The use of other packaging methods or components other than those documented in this report may render this certification invalid.

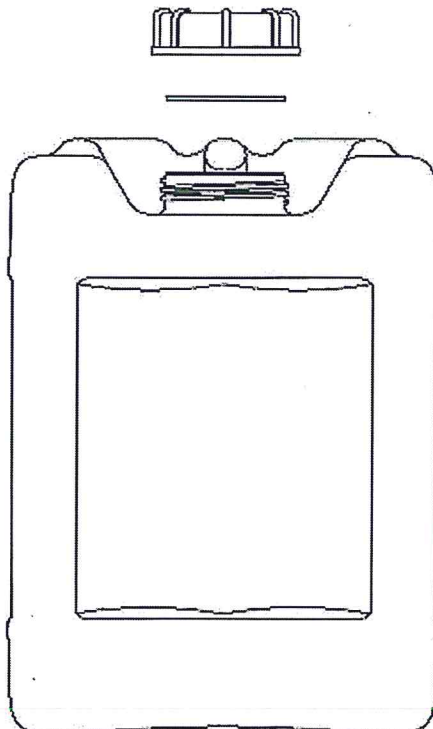
SUMMARY OF PERFORMANCE TESTS					
UN/DOT TEST	CFR REFERENCE	TEST LEVEL	TEST CONTENTS	TEST COMPLETED	TEST RESULTS
Drop	178.603	1.6 m	Windshield Fluid/Antifreeze Coolant 50/50 Diluted (WW?A)	January 6, 2017	PASS
Leakproofness	178.604	20 kPa – 5 Min. 3 PSI	Empty	January 5, 2017	PASS
Hydrostatic	178.605	150 kPa – 30 Min.	Water	January 5, 2017	PASS
Dynamic Compression-Stacking	178.606	532.5 lbs	Water	January 5, 2017	PASS
Vibration	178.608	1.6mm – 1 Hr	Water	January 5, 2017	PASS
TEST REPORT NUMBERS: 2004-22, 2005-35, 2006-30 2007-38, 2008-44, 2009-39, 2010-42, 2011-41, 2012-60, 2014-01, 2015-03, 2016-02, 2017-01					
UN MARKING: (CFR 49 – 178.503)				3H1/Y1.6/150/** USA /M5105	
PACKAGING IDENTIFICATION CODE:			3H1 (178.509)		
PERFORMANCE STANDARD:			Y (Packaging meets Packing Group II test)		
MAXIMUM PRODUCT SPECIFIC GRAVITY:			1.6		
INTERNAL TEST PRESSURE:			150 kPa		
YEAR OF MANUFACTURE:			**Insert year the packaging is manufactured		
STATE AUTHORIZING THE MARK:			USA		
PACKAGING CERTIFICATION AGENCY:			(M5105) Priority Plastics, Inc.		
PACKAGE IDENTIFICATION:			M5105		
PERIODIC RETEST DATE:			January 6, 2018		

In the event of future changes to the above referenced test standard, it is the responsibility of Priority Plastics to determine whether additional testing or updating of past testing is necessary to verify that the packaging tested remains in compliance with those standards.

MANUFACTURER:

Priority Plastics, Inc.
 500 Industrial Park Road
 Portland, IN 47371


 Donna Noll
 Quality Manager
 Priority Plastics, Inc.
 500 Industrial Park Rd
 Portland, IN 47371

SECTION II & V: PACKAGING DESCRIPTION / COMPONENT DRAWINGS																																			
2.5 Gallon Rectangle No Vent HDPE Packaging (Equistar LP5100 Resin)																																			
	<table border="1"> <tr> <td>Certification Type:</td> <td>Periodic Retest</td> </tr> <tr> <td>Packaging Code Designation:</td> <td>3H1</td> </tr> <tr> <td>Packing Group:</td> <td>II</td> </tr> <tr> <td>Specific Gravity:</td> <td>1.6</td> </tr> <tr> <td>Hydrostatic Pressure:</td> <td>150 kPa</td> </tr> <tr> <td colspan="2" style="text-align: center;">TEST SAMPLE PREPARATION (Refer to Section IV)</td> </tr> <tr> <td>Overall Package Tare Weight:</td> <td>718.35 Grams (1.6 Lbs.)</td> </tr> <tr> <td>Fill Capacity (98% Overflow):</td> <td></td> </tr> <tr> <td>• WW/A</td> <td>10689 Grams</td> </tr> <tr> <td>• Water</td> <td>10324 Grams</td> </tr> <tr> <td>Package Test Weight:</td> <td></td> </tr> <tr> <td>• WW/A:</td> <td>11.407 Kg (25.15 Lbs.)</td> </tr> <tr> <td>• Water</td> <td>11.402 Kg (25.14 Lbs.)</td> </tr> <tr> <td>Calculated Package Gross Mass:</td> <td>17.2 Kg (37.9 Lbs.)</td> </tr> <tr> <td colspan="2" style="text-align: center;">CLOSING METHODS</td> </tr> <tr> <td>Application Torque for 63mm Cap:</td> <td>150 In-Lbs.</td> </tr> <tr> <td colspan="2">Equipment for 70mm Cap: Torque Wrench # GP-050 H & V-GP-163 A</td> </tr> </table>	Certification Type:	Periodic Retest	Packaging Code Designation:	3H1	Packing Group:	II	Specific Gravity:	1.6	Hydrostatic Pressure:	150 kPa	TEST SAMPLE PREPARATION (Refer to Section IV)		Overall Package Tare Weight:	718.35 Grams (1.6 Lbs.)	Fill Capacity (98% Overflow):		• WW/A	10689 Grams	• Water	10324 Grams	Package Test Weight:		• WW/A:	11.407 Kg (25.15 Lbs.)	• Water	11.402 Kg (25.14 Lbs.)	Calculated Package Gross Mass:	17.2 Kg (37.9 Lbs.)	CLOSING METHODS		Application Torque for 63mm Cap:	150 In-Lbs.	Equipment for 70mm Cap: Torque Wrench # GP-050 H & V-GP-163 A	
	Certification Type:	Periodic Retest																																	
	Packaging Code Designation:	3H1																																	
	Packing Group:	II																																	
	Specific Gravity:	1.6																																	
	Hydrostatic Pressure:	150 kPa																																	
	TEST SAMPLE PREPARATION (Refer to Section IV)																																		
	Overall Package Tare Weight:	718.35 Grams (1.6 Lbs.)																																	
	Fill Capacity (98% Overflow):																																		
	• WW/A	10689 Grams																																	
	• Water	10324 Grams																																	
	Package Test Weight:																																		
	• WW/A:	11.407 Kg (25.15 Lbs.)																																	
	• Water	11.402 Kg (25.14 Lbs.)																																	
	Calculated Package Gross Mass:	17.2 Kg (37.9 Lbs.)																																	
CLOSING METHODS																																			
Application Torque for 63mm Cap:	150 In-Lbs.																																		
Equipment for 70mm Cap: Torque Wrench # GP-050 H & V-GP-163 A																																			