

Part#: 08WTHL



Size: 1 gallon Steel Pail

Color: Black

Lining: Epoxy Phenolic

/ pallet: 175

Gauge: 24/24/24(Body/Bottom/Top)

UN Rating: UN 1A1/X1.5/250

Closure: *Rieke Opening


*Rieke Openings Are Designed For Rieke® FLEXSPOUTS® (PART#26WRIE & 26WRIV)



Supplied By: **The Cary Company**

Ph: 630-629-6600

www.thecarycompany.com

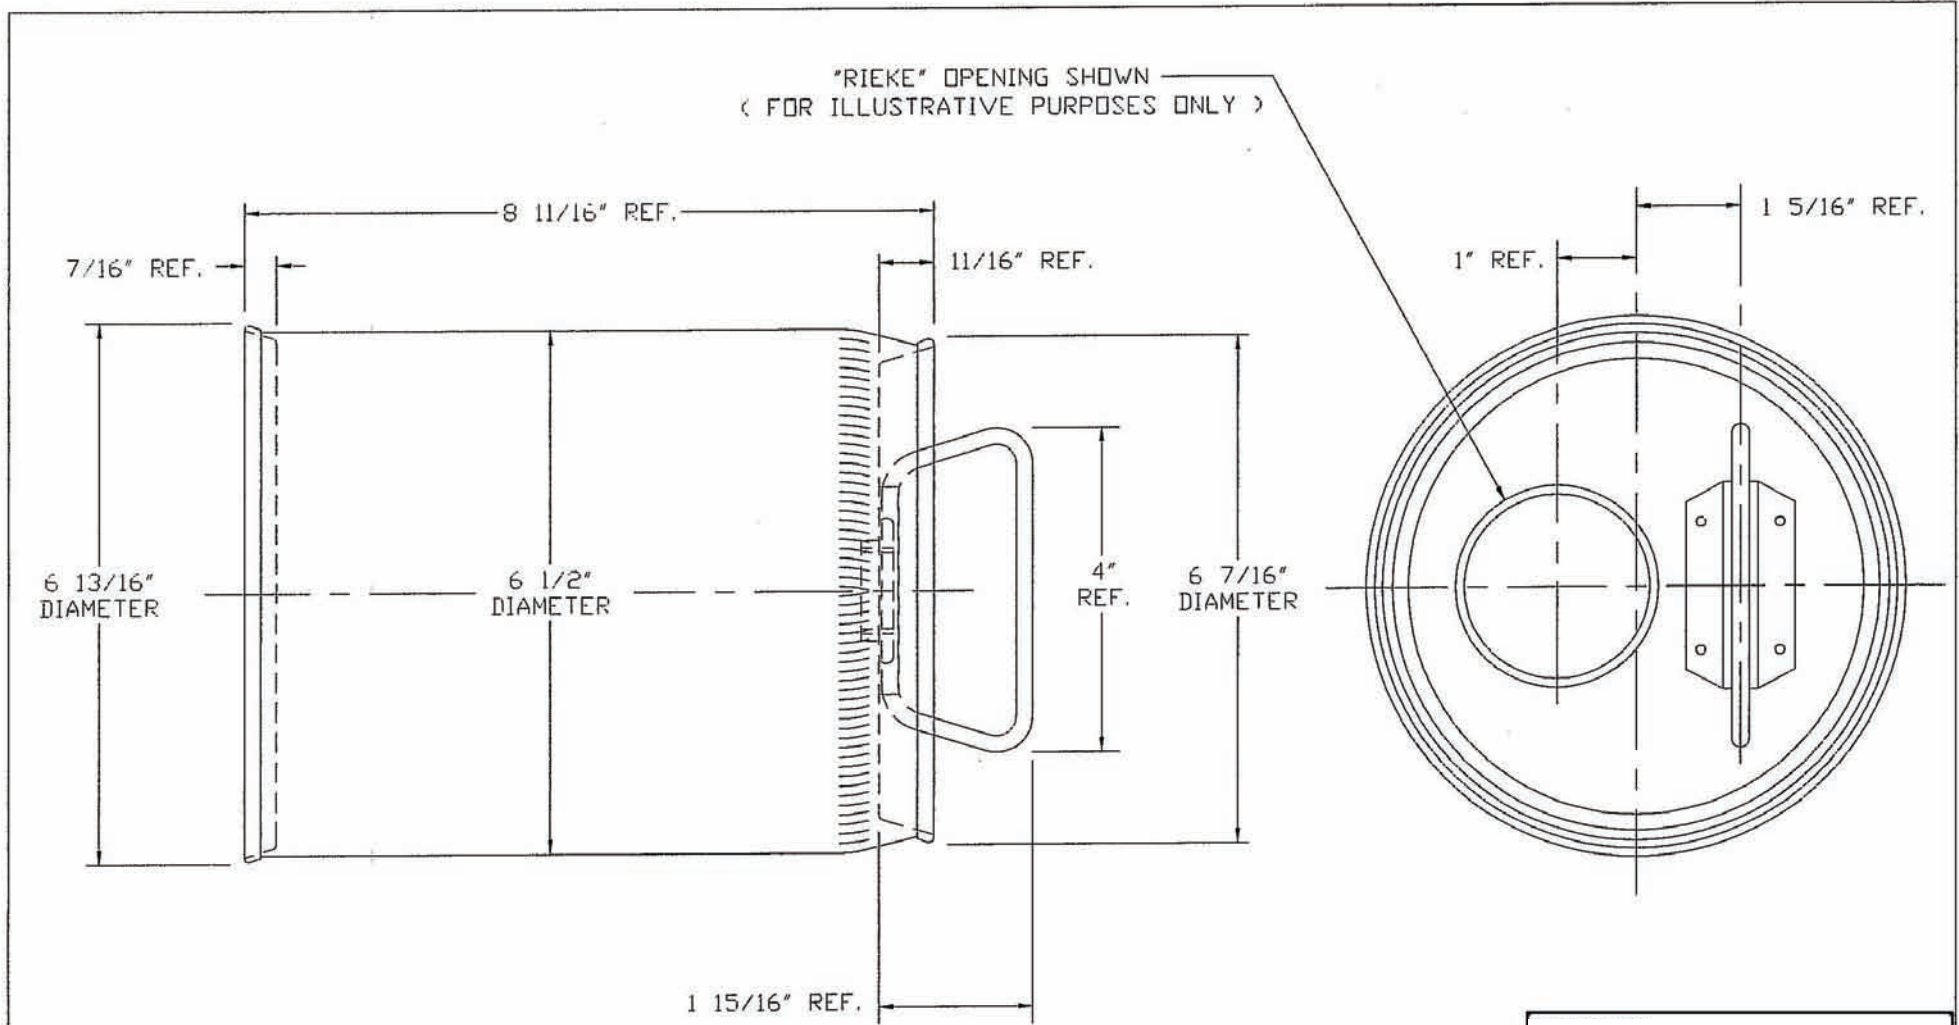

TOLERANCE UNLESS SPECIFIED

FRACTIONS : ± 1/16"
 DECIMAL : ± .062"
 ANGLES : ± 30'

REVISIONS			
No.	DATE	NOTE	BY
1			
2			
3			
4			
5			

6 1/2" DIAMETER -- 1 GALLON STRAIGHT SIDED CLOSED TOP PAIL WITH "RIEKE" OPENING			
DRAWN BY J.V.K.	DATE 2/15/06	Size	SHT 1 OF 1
CHECKED C. HUSHKA	SCALE .5 = 1.0	Dwg#	6152
MACHINE NO. 1303		File#	6152



Supplied By: **The Cary Company**
 Ph: 630-629-6600
 www.thecarycompany.com

CLOSING INSTRUCTIONS FOR PAILS
MANUAL CRIMPING TOOLS

A. Tool: Rieke FS-600 FLEXSPOUT Crimping Tool

1. Products

- a) FS-10-6 FLEXSPOUT
- b) FS-10-7 FLEXSPOUT
- c) FS-10-8V FLEXSPOUT
- d) FS-40 Poly-Flexcap
- e) FS-41 Poly-Flexcap – Retainer and diaphragm only
- f) PFA-22 3/4” Flange and plug assembly
- g) PFA-32 3/4” Flange and crimping ring only.

2. Operation

- a) The closure is to be fully seated on the container opening.
- b) Place the FS-600 crimping tool over the closure, tool should rest on the container.
- c) Grasp the handles (one in each hand). Fully depress the handles applying even pressure on each handle to affect a full crimp.

3. Gauging

- a) Use the G-101-1 gauge to check the crimp. The gauge must pass freely over the crimped closure.

57 mm REL PLASTIC CLOSURE INSERTION

After the container is filled place the closure in the opening and center it as closely as possible.

Apply downward force until the closure is fully seated. The closure will normally snap in with a distinct sound. Do not continue to apply force after the insertion is complete because this could result in damage to the opening.

DRUM FITTING APPLICATION TORQUE VALUES- 3/4” to 2-3/4”

Steel plug with Visecar (Buna N)	2”	30 Ft.Lbs.
	1-1/2”	30 Ft.Lbs.
Steel Plug with Polyseal or Irradiated Polyseal	3/4”	16 Ft.Lbs
	2”	40 Ft.Lbs.
Nylon or Plastic plug with White EPT or White Visecar	3/4”	20 Ft.Lbs.
	2”	20 Ft.Lbs.
Tri-Sure or Rieke Steel plug with Black Buna or EPDM Gaskets	3/4”	9 Ft.Lbs.
	2”	20 Ft.Lbs.
	3/4”	12 Ft.Lbs.

SCREW NOZZLE AND ASSEMBLIES

The recommended application torque for 2-1/8 and 2-1/4 inch screw nozzles is 40-60 inch pounds. Thread-stripping can occur if the screw cap is over torque.



Supplied By: **The Cary Company**

Ph: 630-629-6600

www.thecarycompany.com